


CAMVIEW

Hybrid / Network Video Recorder



CV-NHK04M-W

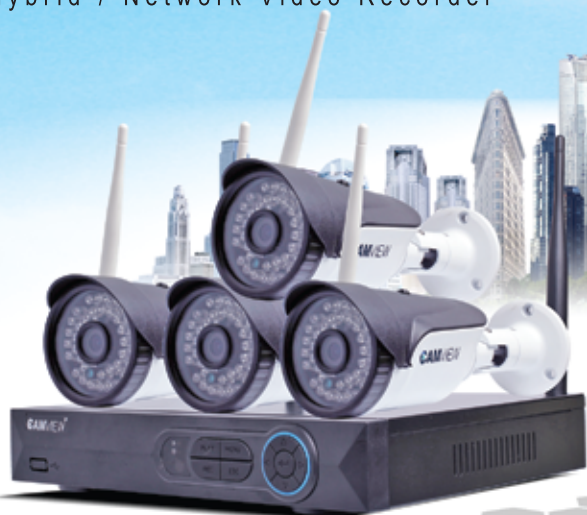

CV-NHK08M-W



The Best Quality CCTV Security System for Commercial & Residential

Wireless IP Cam & NVR

Secure On Your Device



- ▶ Solution for Home & retail industry.
- ▶ IP wireless solution.
- ▶ Smart Non Cabling Solution.
- ▶ Home & retail Industry security solution.
- ▶ Full control monitoring by your device.(Smartphone/PC Computer).
- ▶ Easy Installation.



IPC Specification

Specification	1.3 MP
Operating System	Embedded Linux
Image Sensor	1/3" Progressive
	Scan Sensor
S/N Ratio	> 39.1 dB
Resolution	1280 x 960 16 : 9
	High Definition
Maximum illumination	Color: 0.1 LUX b/w: 0.01 LUX
OSD	Date Time & Title
White balance	Auto
Day & Night	Auto / Color / BW
3D-DNR	Auto

Mirror/Flip	On / Off
Privacy Regional Shelter	4 zone Selectable
Stream	Dual-Stream
	1280 x 960@15fps
	640 x 360@15fps
Anti-thunder Level	Standard IEC 61000-4-5
Power	DC 12V - 1A
Consumption	≤ 6W
Interface	RJ45 / WIFI 802.11 b/g/n
Working temperature/humidity	-10° C to + 50° C / 30% to 80%
Storage temperature/humidity	-20° C to + 60° C / 20% to 90%
Size	205 (L) x 70 (W) x 55 (H) mm
Weight	500 g

NVR Parameter

Operating System	Embedded Linux OS	4 CH	8 CH
AV (audio/video) input	Network Video	1ch, resolution: 1024 x 768, 1366 x 768	1ch, resolution: 1024 x 768, 1366 x 768
AV (audio/video) output	HDMI input	1440 x 900, 1920 x 1080	1440 x 900, 1920 x 1080
		1ch, resolution: 1024 x 768, 1366 x 768	1ch, resolution: 1024 x 768, 1366 x 768
	VGA output	1440 x 900, 1920 x 1080	1440 x 900, 1920 x 1080
	Video Resolution	720P / 960P / 1080 P	720P / 960P / 1080 P
AV CODEC	Synch-playback	4CH	4CH
Specification	Video/Capture mode	Manual - Time - Motion - Alarm	Manual - Time - Motion - Alarm
Video Control	Playback Mode	Realtime - Routine - Event	Realtime - Routine - Event
	Back Up	USB Back Up	USB Back Up
HDD	Type	1* SATA interface	1* SATA interface
	Max. capacity	4 TB at most for Each	4 TB at most for Each
External Interface	Network Interface	1/4 adaptable RJ45 10M/100<	1/4 adaptable RJ45 10M/100<
		1/2 WIFI interface	1/2 WIFI interface
	USB Interface	1/2 USB 2.0	1/2 USB 2.0
Network Control	Protocol	UPnP (plug & play). SMTP (email service)	UPnP (plug & play). SMTP (email service)
		PPoE (dial-up). DHCP (Automatically)	PPoE (dial-up). DHCP (Automatically)
		Obtain an Ip addresss), etc...	Obtain an Ip addresss), etc...
Others	Power	DC 12V 2 A	DC 12V 2 A
	Consumption (excluding HDD)	≤ 5 W	≤ 5 W
	Working Temperature	-10°C - 55° C	-10°C - 55° C
	Working Humidity	10% - 90%	10% - 90%
	Size	257 x 210 x 45 mm	257 x 210 x 45 mm
	Weight (excluding HDD)	≤ 1 Kg	≤ 1 Kg

Informasi Produk & Penjualan Hubungi :